



X7CAP-880

80° Azimuth Beam, 96.0 inches

Directing our energies for you.


698-896 & 1710-2170 MHz Band

Electrical Specifications

| | |
|------------------------------|-------------------------|
| Frequency | 698-896 & 1710-2170 MHz |
| Polarization | Slant +/- 45 |
| Gain @ 698 MHz | 13.4 dBd |
| Gain @ 896 MHz | 14.3 dBd |
| Gain @ 1710 MHz | 15.9 dBd |
| Gain @ 2155 MHz | 16.8 dBd |
| Horizontal Beam (3dB Points) | 80° & 80° |
| Vertical Beam (3dB Points) | 8° & 4.5° |
| Electrical Downtilt Options | 2, 4 or 6° |
| VSWR / Return Loss | <1.45:1 / 14.7 dB |
| VSWR Opt "i" / Return Loss | <1.50:1 / 14.0 dB |
| Front-to-Back at Horizon | >27 dB & >27 dB |
| Upper Side Lobe Suppression | <-18 dB & <-18 dB |
| Impedance | 50 Ohms |
| Power Input Per Connector | 500/250 Watts CW |
| Isolation | < -27 dB |
| Intermodulation (2x20W) | <-150 dBc |


Mechanical Specifications

| | |
|--------------------------------|--|
| Input Connector (female) | Back 7/16 DIN (silver finish) or w/bot. opt. |
| Antenna Dimensions (LxWxD) | 96.0 x 14.6 x 8.6 in. (2438 x 371 x 218mm) |
| *Antenna Weight | 49.4 lbs |
| Bracket Weight | 18.2 lbs |
| Lightning Protection | Direct Ground |
| RF Distribution | Printed Microstrip Substrate |
| Radome | Ultra High-Strength Luran |
| Weatherability | UV Stabilized, ASTM D1925 |
| Radome Water Absorption | ASTM D570, 0.45% |
| Environmental | MIL-STD-810E |
| Wind Survival | 150 mph |
| Front Wind Load @ 100MPH | 288 lbs |
| Equivalent Flat Plate @ 100MPH | 5.87 sq-ft. (c=2) |
| Mounting Brackets | Fits 3.5 Inch Max. O.D. Pipe |
| Mechanical Downtilt Range | 0-6° |
| Clamps/Bolts | Hot Dip Galvanized Steel/Stainless Steel |

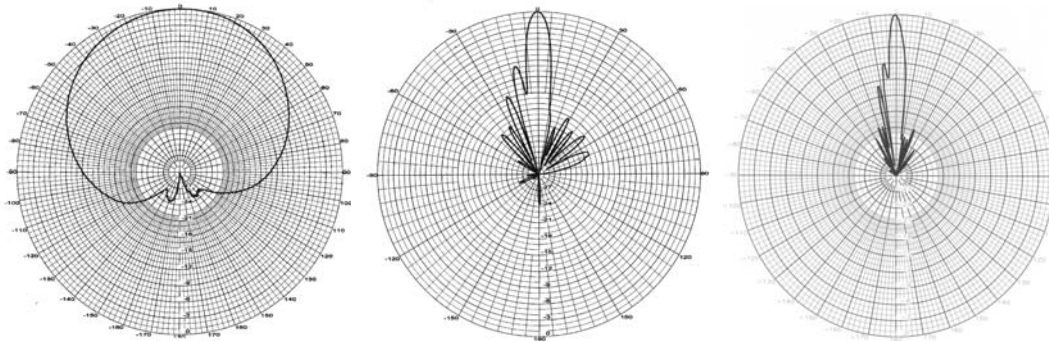

Available with Opt "i"

- The Opt "i" antenna option provides Integrated Diplexers that reduce mainline cables and eliminate separate external devices.



5 Year Warranty

Ordering Information & Options

- X7CAP-880-xy "xy" is a placeholder for the built-in fixed electrical downtilt in degrees 2, 4 or 6, "x" for low band, y for high band.
- X7CAP-880-xyi to add the Opt "i" option for integrated diplexers, add "i" to model number
- X7CAP-880-xyi-bot for bottom mounted connectors, add "-bot" (otherwise antenna comes standard with back mounted connectors)
- X7CAP-880-xyi-bot-# add a "j#" to add a 1/2" RF cable, where "#" is the cable length, "j2" is 2 meters, "j4" is 4 meters, "j6" is 6 meters...

*Antenna Weight may vary slightly with options such as back or bottom connector and integrated diplexers.