




DUO4-8686

Directing our energies for you.

Dual Band Dipole

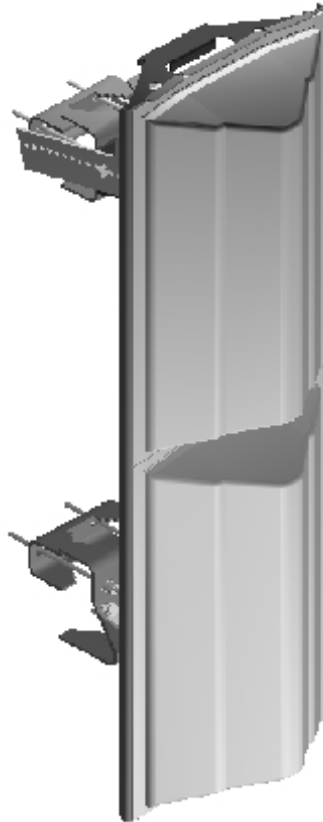

86 Deg. Azimuth Beams
15 & 7 Deg. Elevation Beams
13.6 & 15.8 dBi Gain

PCS & Cellular in One Package
Independent Control of Electrical Beam Downtilt
High Power Handling Capability
Anti-Corrosion Design for Superb IM Performance
Optional Internal Dual Band Combiner



Directing our energies for you.

DUO4-8686

Electrical Specifications

Cellular

PCS

Frequency Range	824-896 MHz	1850-1990 MHz
Gain	13.6 dBi	15.8 dBi
Electrical Downtilt Options	0, 2, 4 or 6 Degrees	0, 2, 4 or 6 Degrees
VSWR	1.35:1 Maximum	1.35:1 Maximum
VSWR (with -i option)	1.50:1 Maximum	1.50:1 Maximum
Front-to-Back at Horizon	> 25 dB	> 30 dB
Upper Side Lobe Suppression	< -17 dB	< -18 dB
Elevation Beam (3-dB Points)	15 Degrees	7 Degrees
Azimuth Beam (3-dB Points)	86 Degrees	86 Degrees
Polarization	Vertical	Vertical
Impedance	50 Ohms	50 Ohms
Power Input Rating	500 CW	250 CW
Intermodulation	typ. -150 dBc (2x20W)	typ. -150 dBc (2x20W)
Port to Port Isolation	>30 dB	>30 dB

Mechanical Specifications

Input Connectors (female)	Two Back Mounted 7/16 DIN (Silver Finish)
Antenna Dimensions (LxWxD)	48.4 x 14.0 x 9.0 Inches (10.7" deep with option 'i')
*Antenna Weight	28 lbs
Bracket Weight	13.2 lbs
Lightning Protection	Direct Ground
RF Distribution	Cellular: Silver Plated Brass PCS: Printed Microstrip Substrate
Radome	Ultra High-Strength Luran
Weatherability	UV Stabilized, ASTM D1925
Radome Water Absorption	ASTM D570, 0.45%
Environmental	MIL-STD-810E
Wind Survival	150 mph
Front Wind Load at 100 mph	124.3 lbs
Front Flat Plate Equivalent	2.53 sq-ft. (c=2)
Mounting Brackets	Fits 2.5 to 3 Inch Schedule 40 Pipe
Mechanical Downtilt Range	0-12 Degrees in 1 Degree Increments
Clamps/Bolts	Hot Dip Galvanized Steel/Stainless Steel

Ordering Information

<u>Model</u>	<u>Options</u>
DUO4-8686-xy	x=Electrical Downtilt at 800 MHz in Degrees (0, 2, 4 or 6) y=Electrical Downtilt at 1900 MHz in Degrees (0, 2, 4 or 6)
DUO4-8686-xyi	i=Dual Band Combiner included as an internal device

*Antenna Weight may vary slightly with options such as back or bottom connector and integrated diplexers.

